


Sophtech

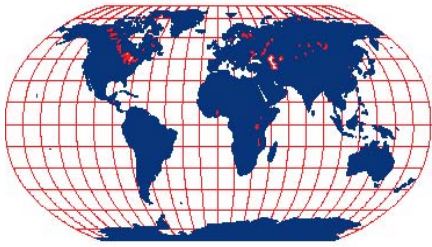

Worldwide

Sophtech Worldwide

13131 Hamilton Commons Blvd

Noblesville, Indiana 46060

Phone: 317-776-5680 Fax: 317-776-5687

www.sophtech.net

sales@sophtech.net

STF10-0029 Series


Temperature Range: -45° to +225° with Nitrile Seals
-20° to +250° with Viton Seals

Hardware Material: Corrosion Protected metal endcaps and core


Filter Medium: Inert Micro-Glass fibers impregnated and bonded with stable resin, supported with polymer mesh

Collapse Rating: 150 psid per ISO-2941

Removal Rating: Beta 3 > 200 per ISO 4572

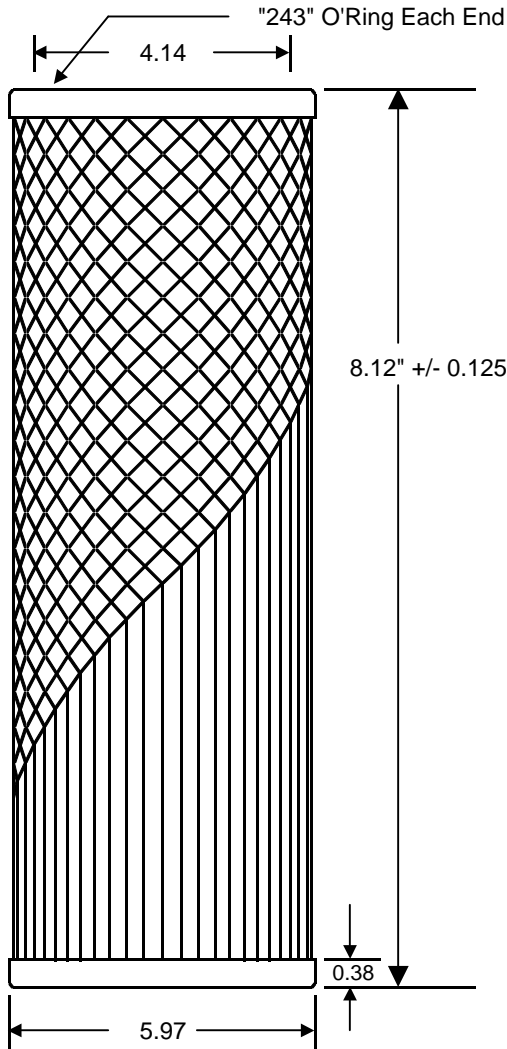

Pressure Drop versus Flow Rate

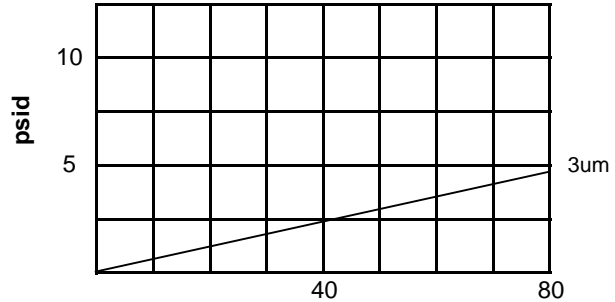

GPM - 150 SUS, 0.9 SG Fluid

Pressure drop varies linearly with viscosity.

Grade	Removal Rating - ISO 16889					
	um© for Beta Value					
	2	10	75	100	200	1000
3 um	<2	<2	3.1	3.3	3.8	5

All dimensions in inches, +/- .010 unless otherwise specified.

This confidential drawing and the information contained herein is the sole property of Sophtech Worldwide and may not be used or reproduced in any manner without written consent.



Filter Part Number Information	
STF10-0029B (Buna)	3um
STF10-0029V (Viton)	

Phone: 317-776-5680

Fax: 317-776-5687

Email: sales@sophtech.net