


SopHtech

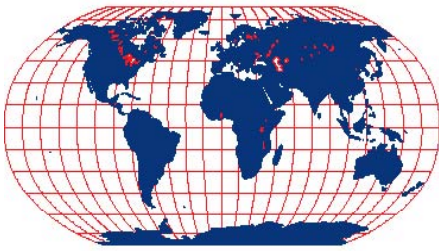

Worldwide

SopHtech Worldwide

13131 Hamilton Commons Blvd

Noblesville, Indiana 46060

Phone: 317-776-5680 Fax: 317-776-5687


www.sophtech.net

sales@sophtech.net

STF10-0043 Series


- Temperature Range:** -45° to +225° with Nitrile Seals
-20° to +250° with Viton Seals
- Hardware Material:** Corrosion protected metal endcaps and core
- Filter Medium:** Inert Micro-Glass fibers impregnated and bonded with stable resin, supported by polymer mesh
- Collapse Rating:** 150 psid per ISO-2941
- Removal Rating:** Beta 12 > 200 per ISO 4572

Pressure Drop versus Flow Rate

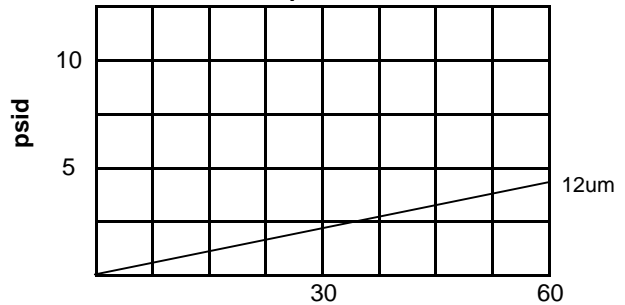

GPM - 150 SUS, 0.9 SG Fluid

Pressure drop varies linearly with viscosity.

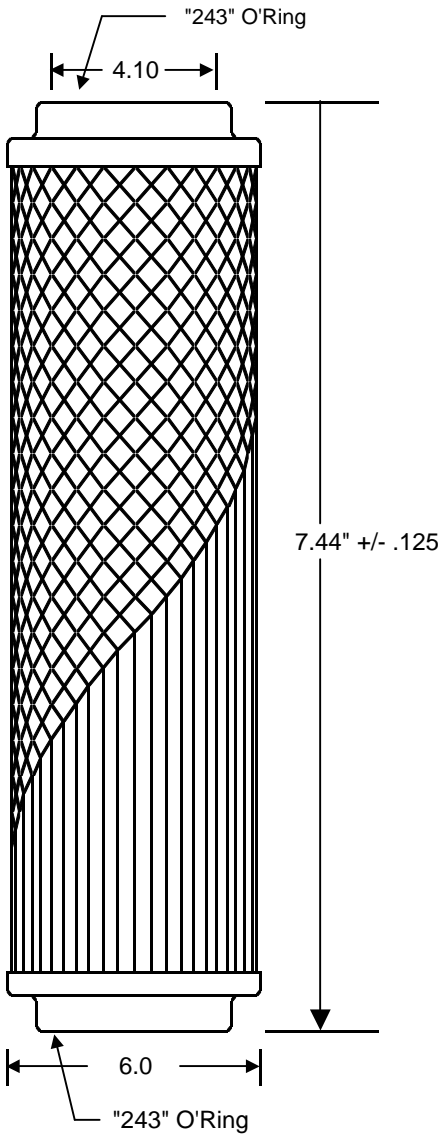

All dimensions in inches, +/- .010 unless otherwise specified.

Grade	Removal Rating - ISO 16889					
	um@ for Beta Value					
	2	10	75	100	200	1000
12um	3.2	5.5	8.3	8.7	9.7	12



Filter Part Number Information	
STF10-0043B (Buna)	12um
STF10-0043V (Viton)	

This confidential drawing and the information contained herein is the sole property of SopHtech Worldwide and may not be used or reproduced in any manner without written consent.