


SophTech

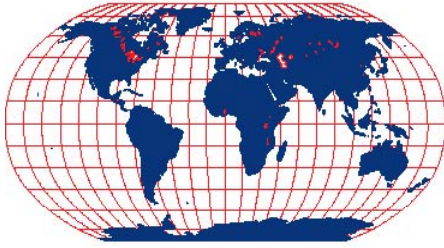

Worldwide

SophTech Worldwide

13131 Hamilton Commons Blvd

Noblesville, Indiana 46060


Phone: 317-776-5680 Fax: 317-776-5687

www.sophtech.net


sales@sophtech.net

STF10-0200 Series

- Temperature Range:** -45° to +225° with Nitrile Seals
-20° to +250° with Viton Seals
- Hardware Material:** Corrosion Protected metal endcaps and core
- Filter Medium:** Inert Micro-Glass fibers impregnated with stable resin, supported by epoxy coated steel wire mesh
- Collapse Rating:** 3000 psid per ISO 2941
- Removal Rating:** Beta 15 > 200 per ISO 4572

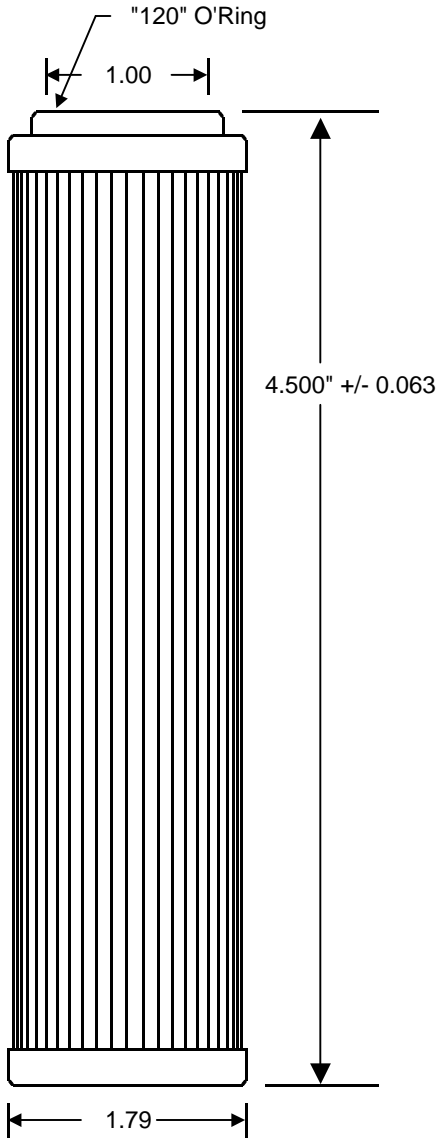

All dimensions in inches, +/- .010 unless otherwise specified.

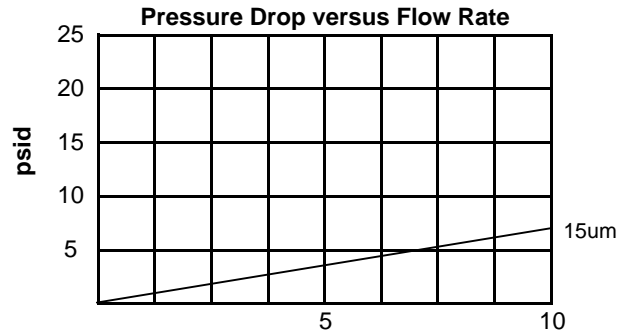

GPM - 150 SUS, 0.9 SG Fluid
Pressure drop varies linearly with viscosity.

Removal Rating - ISO 16889						
Grade	um [©] for Beta Value					
	2	10	75	100	200	1000
15um	3.3	6.3	10.1	10.7	12	15



Filter Part Number Information	
STF10-0200B (Buna)	15um
STF10-0200V (Viton)	

This confidential drawing and the information contained herein is the sole property of SophTech Worldwide and may not be used or reproduced in any manner without written consent.