


SophTech

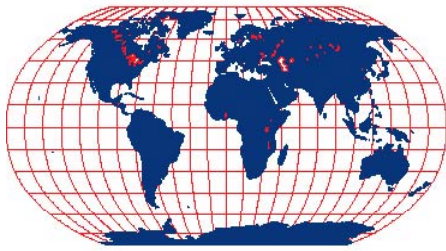

Worldwide

SophTech Worldwide

13131 Hamilton Commons Blvd


Noblesville, Indiana 46060

Phone: 317-776-5680 Fax: 317-776-5687

www.sophtech.net

sales@sophtech.net


STF10-0201 Series

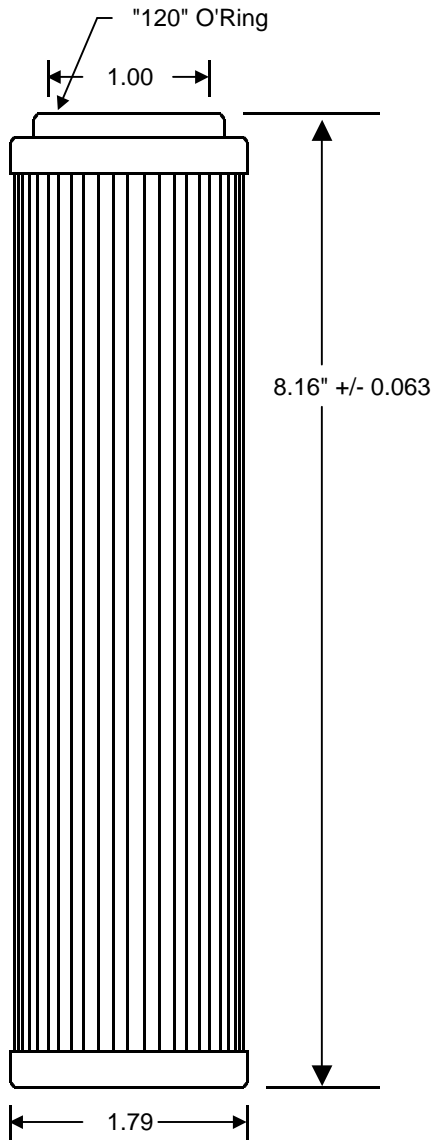

All dimensions in inches, +/- .010 unless otherwise specified.

This confidential drawing and the information contained herein is the sole property of SophTech Worldwide and may not be used or reproduced in any manner without written consent.

- Temperature Range:** -45° to +225° with Nitrile Seals
-20° to +250° with Viton Seals
- Hardware Material:** Corrosion Protected metal endcaps and core
- Filter Medium:** Inert Micro-Glass fibers impregnated with stable resin, supported by epoxy coated steel wire mesh
- Collapse Rating:** 3000 psid per ISO 2941
- Removal Rating:** Beta 2 > 200 per ISO 4572

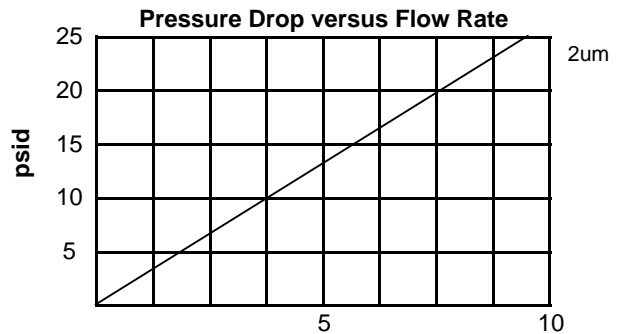

GPM - 150 SUS, 0.9 SG Fluid
Pressure drop varies linearly with viscosity.

Removal Rating - ISO 16889						
Grade	um© for Beta Value					
	2	10	75	100	200	1000
2um	<2	<2	3	3.2	3.8	6



Filter Part Number Information	
STF10-0201B (Buna)	2um
STF10-0201V (Viton)	