


**SophTech**

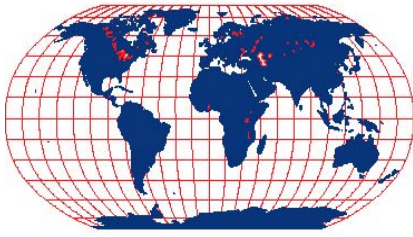

**Worldwide**

**SophTech Worldwide**

**13131 Hamilton Commons Blvd**

**Noblesville, Indiana 46060**



Phone: 317-776-5680 Fax: 317-776-5687

[www.sophtech.net](http://www.sophtech.net)

[sales@sophtech.net](mailto:sales@sophtech.net)

**STF10-0337 Series**

- Temperature Range:** -45° to +225° with Nitrile Seals  
-20° to +250° with Viton Seals
- Hardware Material:** Corrosion Protected metal endcaps and core
- Filter Medium:** Inert Micro-Glass fibers impregnated with stable resin, supported with polymer mesh
- Collapse Rating:** 150 psid per ISO-2941
- Removal Rating:** Beta 12 > 200 per ISO 4572
- Seals Available:** "119" O'Ring, SOB

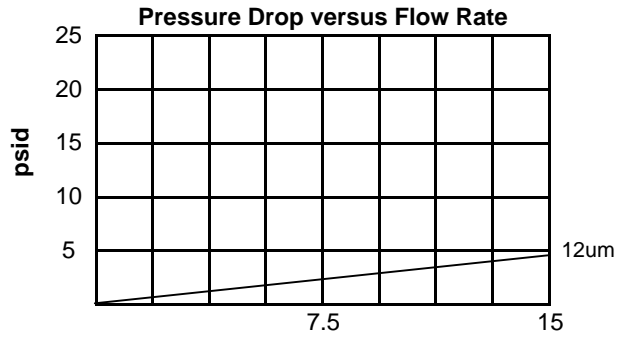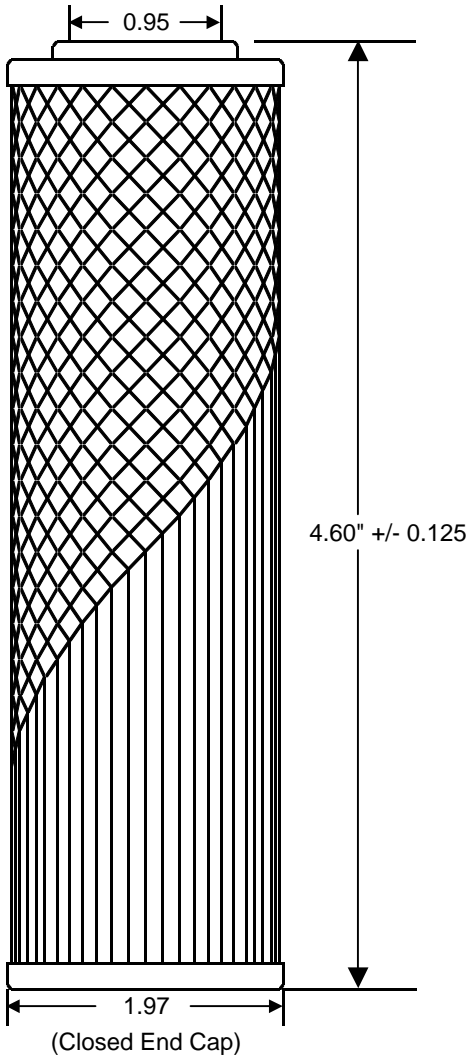

**GPM - 150 SUS, 0.9 SG Fluid**  
Pressure drop varies linearly with viscosity.

Grade	Removal Rating - ISO 16889					
	um© for Beta Value					
	2	10	75	100	200	1000
12um	3.2	5.5	8.3	8.7	9.7	12

All dimensions in inches, +/- .010 unless otherwise specified.

This confidential drawing and the information contained herein is the sole property of SophTech Worldwide and may not be used or reproduced in any manner without written consent.



Filter Part Number Information	
STF10-0337B (Buna)	12um
STF10-0337V (Viton)	

**Phone: 317-776-5680**

**Fax: 317-776-5687**

**Email: sales@sophtech.net**