


SophTech

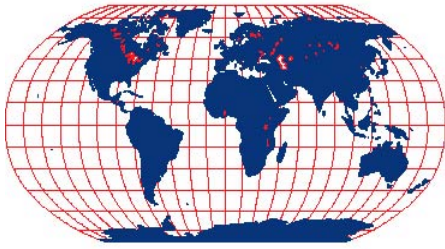

Worldwide

SophTech Worldwide

13131 Hamilton Commons Blvd


Noblesville, Indiana 46060

Phone: 317-776-5680 Fax: 317-776-5687

www.sophtech.net

sales@sophtech.net


STF10-0400 Series

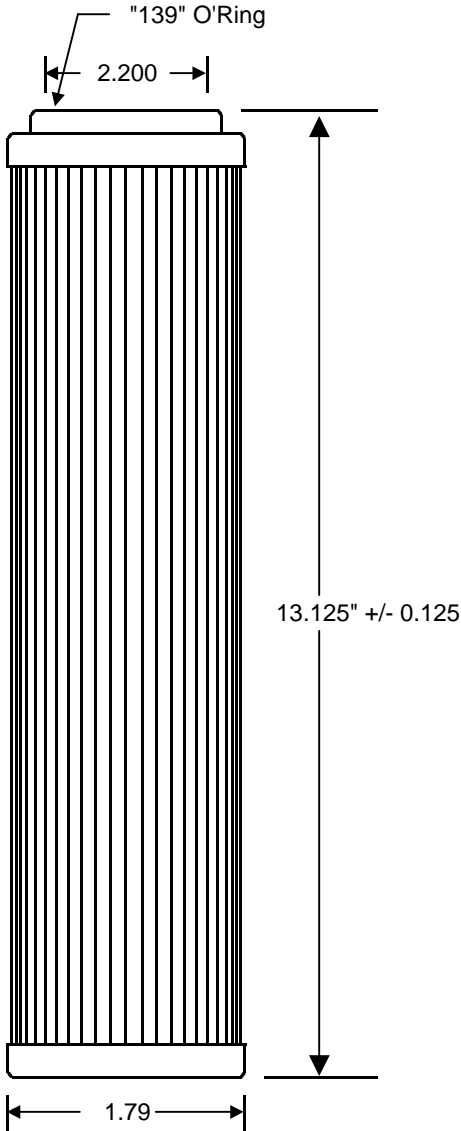

All dimensions in inches, +/- .010 unless otherwise specified.


This confidential drawing and the information contained herein is the sole property of SophTech Worldwide and may not be used or reproduced in any manner without written consent.

- Temperature Range:** -45° to +225° with Nitrile Seals
-20° to +275° with Viton Seals
- Hardware Material:** Corrosion Protected metal endcaps and core
- Filter Medium:** Inert Micro-Glass fibers impregnated with stable resin, supported by epoxy coated steel wire mesh
- Collapse Rating:** 3000 psid per ISO-2941
- Removal Rating:** Beta 2 > 200 per ISO 4572

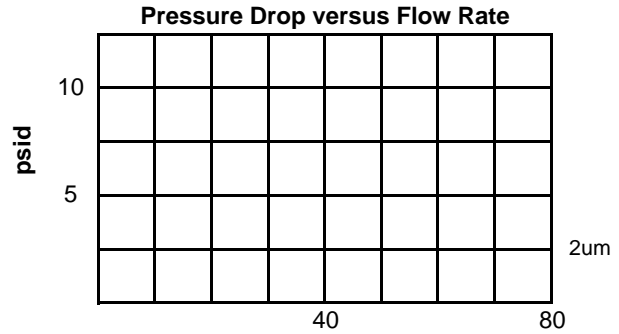

GPM - 150 SUS, 0.9 SG Fluid
Pressure drop varies linearly with viscosity.

| Grade | Removal Rating - ISO 16889 | | | | | |
|-------|----------------------------|----|----|-----|-----|------|
| | um© for Beta Value | | | | | |
| | 2 | 10 | 75 | 100 | 200 | 1000 |
| 2um | <2 | <2 | 3 | 3.2 | 3.8 | 5 |

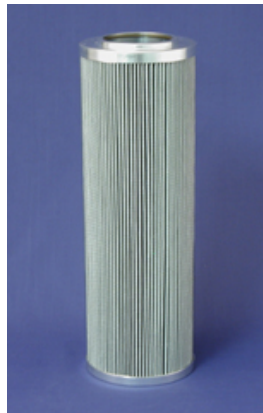

| Filter Part Number Information | |
|--------------------------------|-----|
| STF10-0400B (Buna) | 2um |
| STF10-0400V (Viton) | |

Phone: 317-776-5680

Fax: 317-776-5687

Email: sales@sophtech.net