


SophTech

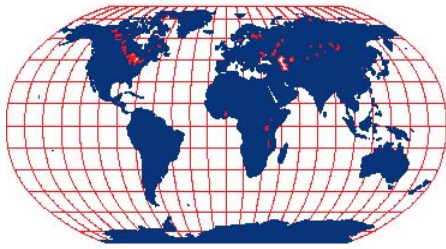

Worldwide

SophTech Worldwide


13131 Hamilton Commons Blvd
Noblesville, Indiana 46060

Phone: 317-776-5680 Fax: 317-776-5687

www.sophtech.net

sales@sophtech.net


STF10-0401 Series

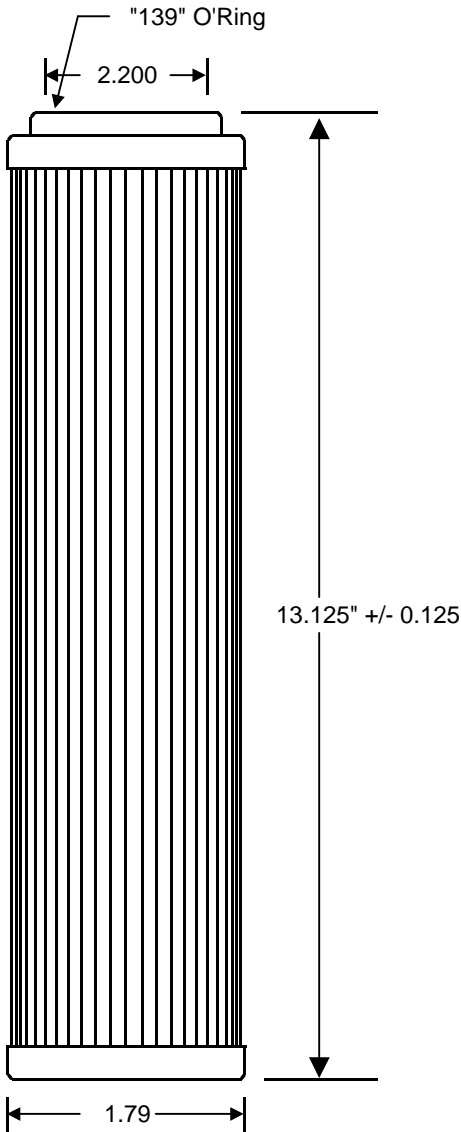

All dimensions in inches, +/- .010 unless otherwise specified.


- Temperature Range:** -45° to +225° with Nitrile Seals
-20° to +275° with Viton Seals
- Hardware Material:** Corrosion Protected metal endcaps and core
- Filter Medium:** Inert Micro-Glass fibers impregnated with stable resin, supported by epoxy coated steel wire mesh
- Collapse Rating:** 3000 psid per ISO-2941
- Removal Rating:** Beta 15 > 200 per ISO 4572

Pressure Drop versus Flow Rate

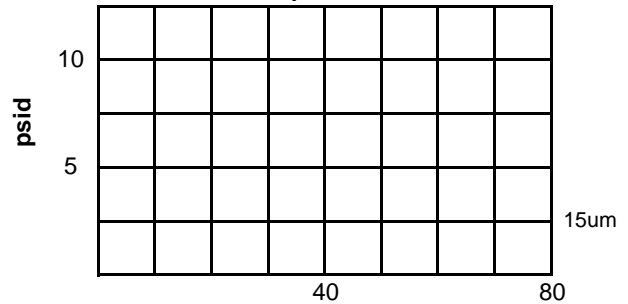

GPM - 150 SUS, 0.9 SG Fluid
Pressure drop varies linearly with viscosity.

Grade	Removal Rating - ISO 16889					
	um [©] for Beta Value					
	2	10	75	100	200	1000
15um	<2	<2	3	3.2	3.8	5

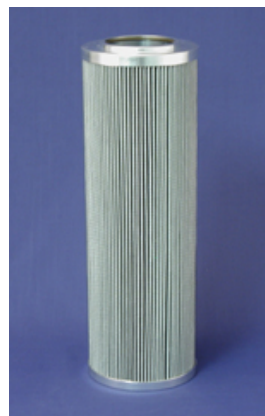

Filter Part Number Information	
STF10-0401B (Buna)	15um
STF10-0401V (Viton)	

This confidential drawing and the information contained herein is the sole property of SophTech Worldwide and may not be used or reproduced in any manner without written consent.