


**SophTech**

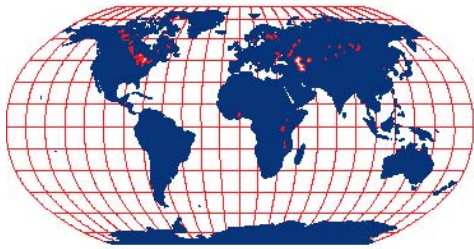

**Worldwide**

**SophTech Worldwide**

**13131 Hamilton Commons Blvd**

**Noblesville, Indiana 46060**



Phone: 317-776-5680 Fax: 317-776-5687

[www.sophtech.net](http://www.sophtech.net)

[sales@sophtech.net](mailto:sales@sophtech.net)

**STF10-0410 Series**

- Temperature Range:** -45° to +225° with Nitrile Seals  
-20° to +250° with Viton Seals
- Hardware Material:** Corrosion Protected metal endcaps and core
- Filter Medium:** Inert Micro-Glass fibers impregnated and bonded with stable resin, supported with polymer mesh
- Collapse Rating:** 150 psid per ISO-2941
- Removal Rating:** Beta 1 > 200 per ISO 4572
- Seals Available:** "128" O'Ring, SOE

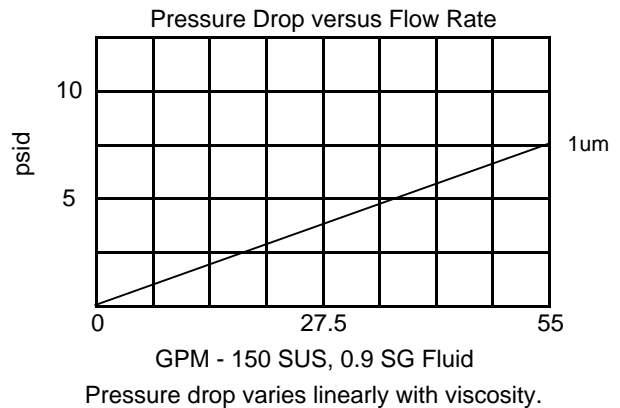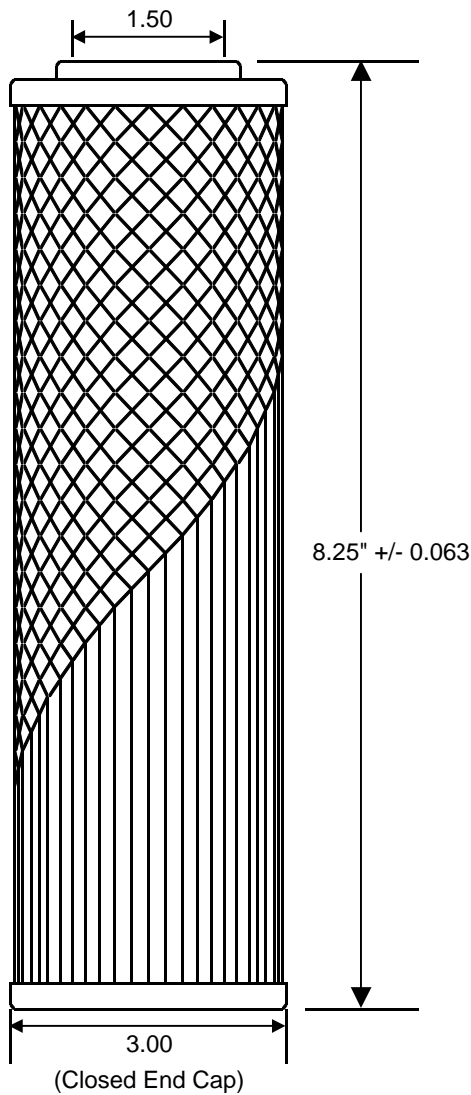

| Grade | Removal Rating - ISO 16889 |    |    |     |     |      |
|-------|----------------------------|----|----|-----|-----|------|
|       | um© for Beta Value         |    |    |     |     |      |
|       | 2                          | 10 | 75 | 100 | 200 | 1000 |
| 1 um  | <2                         | <2 | <2 | <2  | 2   | 2.5  |

All dimensions in inches, +/- .010 unless otherwise specified.

This confidential drawing and the information contained herein is the sole property of SophTech Worldwide and may not be used or reproduced in any manner without written consent.



| Filter Part Number Information |     |
|--------------------------------|-----|
| STF10-0410B (Buna)             | 1um |
| STF10-0410V (Viton)            |     |

Phone: 317-776-5680

Fax: 317-776-5687

Email: [sales@sophtech.net](mailto:sales@sophtech.net)