


**SophTech**

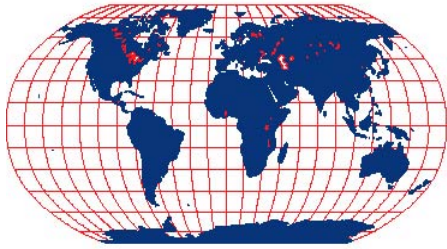

**Worldwide**

**SophTech Worldwide**

**13131 Hamilton Commons Blvd**

**Fishers, Indiana 46037**

**Phone: 317-776-5680 Fax: 317-776-5687**

[www.sophtech.net](http://www.sophtech.net)

[sales@sophtech.net](mailto:sales@sophtech.net)

**STF10-0450VZYGE Series**

Temperature Range: -45° to +225° with Nitrile Seals  
 -20° to +250° with Viton Seals



Hardware Material: Corrosion Protected metal endcaps and core

Filter Medium: Inert Micro-Glass fibers impregnated with stable resin, supported by epoxy coated steel wire mesh

Collapse Rating: 3000 psid per ISO-2941

Removal Rating: Beta 2 > 200 Per ISO 4572

Seals Available: "131" O'ring, SOB

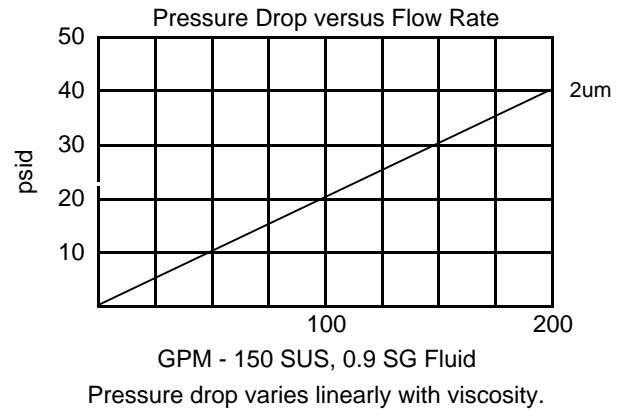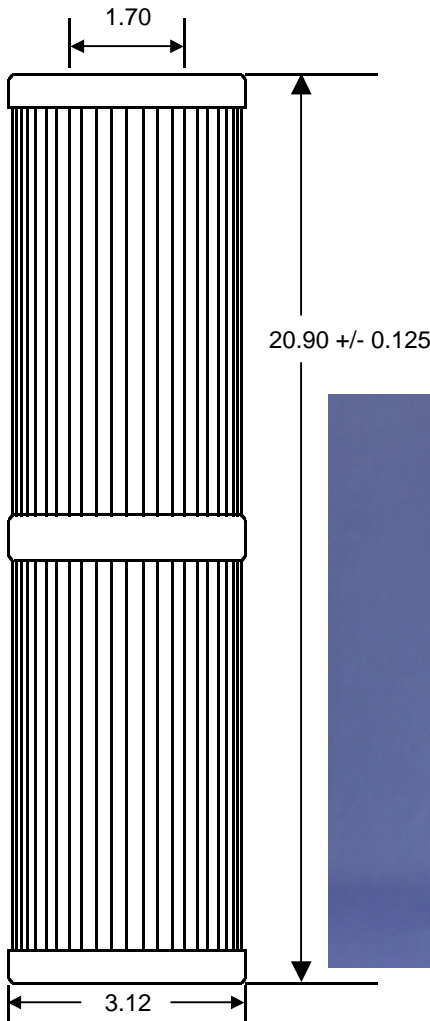

Removal Rating - ISO 16889						
Grade	um <sup>©</sup> for Beta Value					
	2	10	75	100	200	1000
2um	<2	<2	3	3.2	3.8	5

Filter Part Number Equivalency Chart			
HC9601FDP21ZYGE	=	STF10-0450VZYGE	2um

All Dimensions in inches, +/- .010 unless otherwise specified.

This confidential drawing and the information contained herein is the sole property of SophTech Worldwide and may not be used or reproduced in any manner without written consent.

**Phone: 317-776-5680**

**Fax: 317-776-5687**

**Email: sales@sophtech.net**