


**Sophtech**

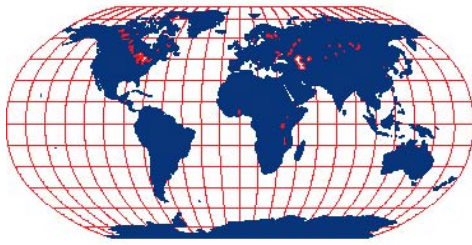

**Worldwide**

***Sophtech Worldwide***


**13131 Hamilton Commons Blvd**

**Noblesville, Indiana 46060**

Phone: 317-776-5680 Fax: 317-776-5687


[www.sophtech.net](http://www.sophtech.net)

[sales@sophtech.net](mailto:sales@sophtech.net)

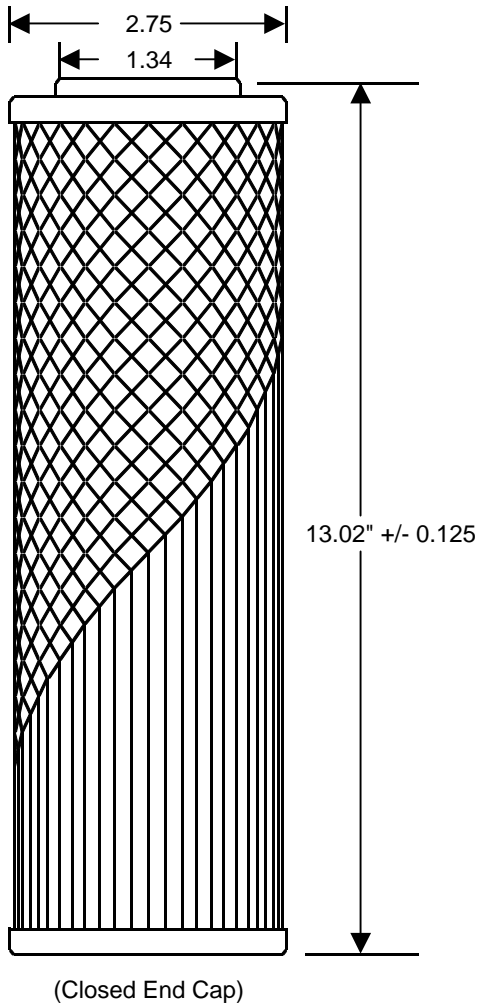

**STF10-0517 Series**

- Temperature Range:** -45° to +225° with Nitrile Seals  
-20° to +225° with Viton Seals
- Hardware Material:** Corrosion Protected metal endcaps and core
- Filter Medium:** Inert Micro-Glass fibers impregnated and bonded with stable resin, supported by polymer mesh
- Collapse Rating:** 150 psid per ISO-2941
- Removal Rating:** Beta 1 > 200
- Seals Available:** "219" O'Ring, SOB

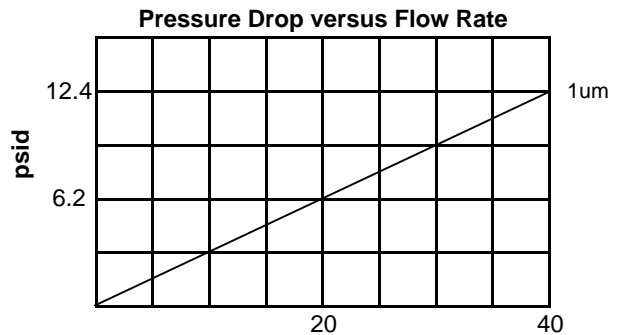

**GPM - 150 SUS, 0.9 SG Fluid**  
Pressure drop varies linearly with viscosity.

Grade	Removal Rating - ISO 16889					
	um© for Beta Value					
	2	10	75	100	200	1000
1um	<2	<2	<2	<2	2	2.5

All dimensions in inches, +/- .010 unless otherwise specified.

This confidential drawing and the information contained herein is the sole property of Sophtech Worldwide and may not be used or reproduced in any manner without written consent.



Filter Number Information	
STF10-0517B (Buna)	1um
STF10-0517V (Viton)	

**Phone: 317-776-5680**

**Fax: 317-776-5687**

**Email: sales@sophtech.net**