


SophTech

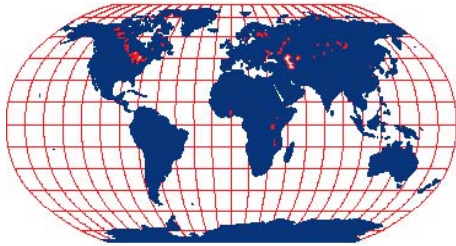

Worldwide

SophTech Worldwide

13131 Hamilton Commons Blvd

Fishers, Indiana 46037

Phone: 317-776-5680 Fax: 317-776-5687

www.sophotech.net



sales@sophotech.net

STF20-01348 Filter

Temperature Range:	-4° to +212° with Nitrile Seals
Hardware Material:	Corrosion Protected metal endcaps and core
Filter Medium:	Inert Micro-Glass fibers impregnated with stable resin, supported by epoxy coated steel wire mesh
Collapse Rating:	3000 psid per ISO-2941
Removal Rating:	Beta 3 > 200 per ISO 4572

Removal Rating ISO 4572	
Grade	Bx>200
10um	10

Removal Rating - ISO 16889						
Grade	um© Rating for Beta Value					
	2	10	75	100	200	1000
10um	3.2	5.5	8.3	8.7	9.7	12

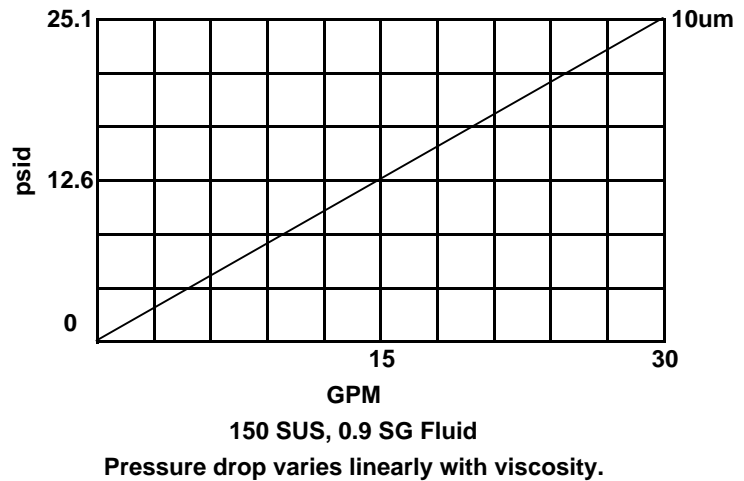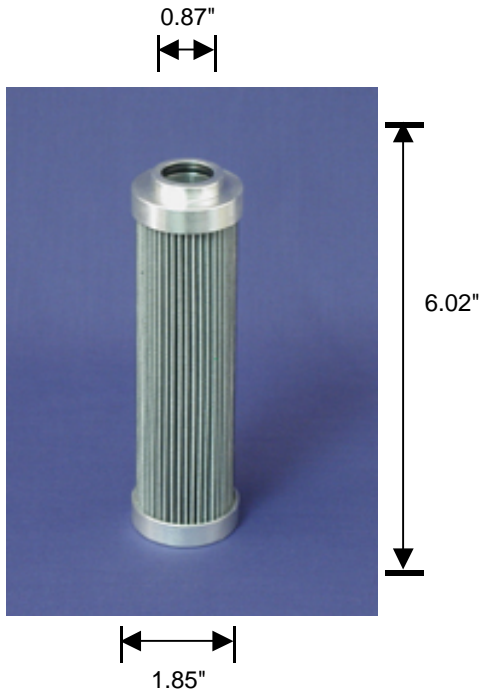

All dimensions in inches, +/- 0.10 unless otherwise specified.

This confidential drawing and the information contained herein is the sole property of SophTech Worldwide and may not be used or reproduced in any manner without written consent.