


SophTech

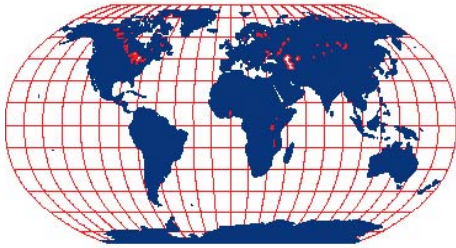

Worldwide

SophTech Worldwide

13131 Hamilton Commons Blvd


Noblesville, Indiana 46060

Phone: 317-776-5680 Fax: 317-776-5687

www.sophtech.net

sales@sophtech.net

STF250G03B High Collapse Filter

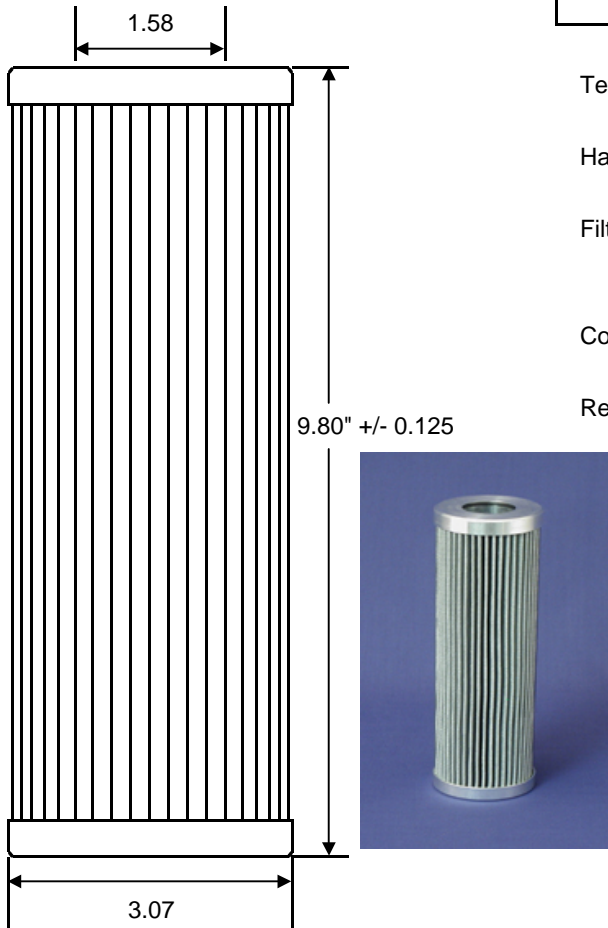


Temperature Range: -4° to +212° with Nitrile Seals

Hardware Material: Corrosion Protected metal endcaps and core

Filter Medium: Inert Micro-Glass fibers impregnated with stable resin, supported by epoxy coated steel wire mesh

Collapse Rating: 3000 psid per ISO-2941

Removal Rating: Beta 3 > 200 per ISO 4572

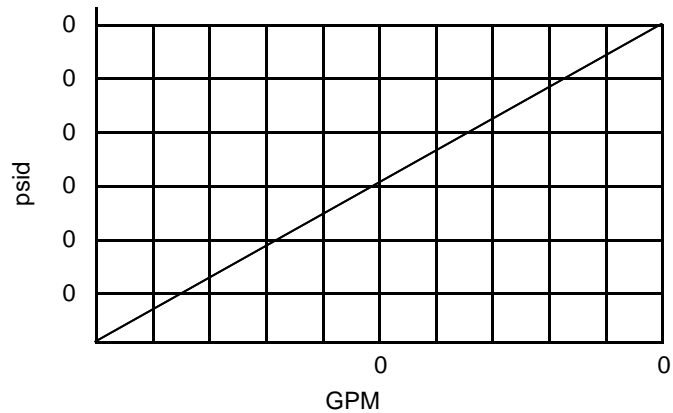

150 SUS, 0.9 SG Fluid
Pressure drop varies linearly with viscosity.

Removal Rating ISO 4572	
Grade	Bx>200
3um	3

Removal Rating - ISO 16889						
Grade	um Rating for Beta Value					
	2	10	75	100	200	1000
3um	<3	<3	3	3.2	3.8	5

All dimensions in inches, +/- 0.10 unless otherwise specified.

This confidential drawing and the information contained herein is the sole property of SophTech Worldwide and may not be used or reproduced in any manner without written consent.