


**SophTech**

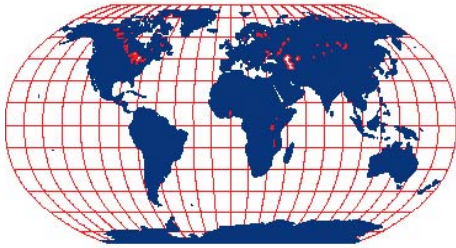

**Worldwide**

**SophTech Worldwide**

13131 Hamilton Commons Blvd


Noblesville, Indiana 46060

Phone: 317-776-5680 Fax: 317-776-5687


[www.sophtech.net](http://www.sophtech.net)

[sales@sophtech.net](mailto:sales@sophtech.net)

**STF411G03B High Collapse Filter**

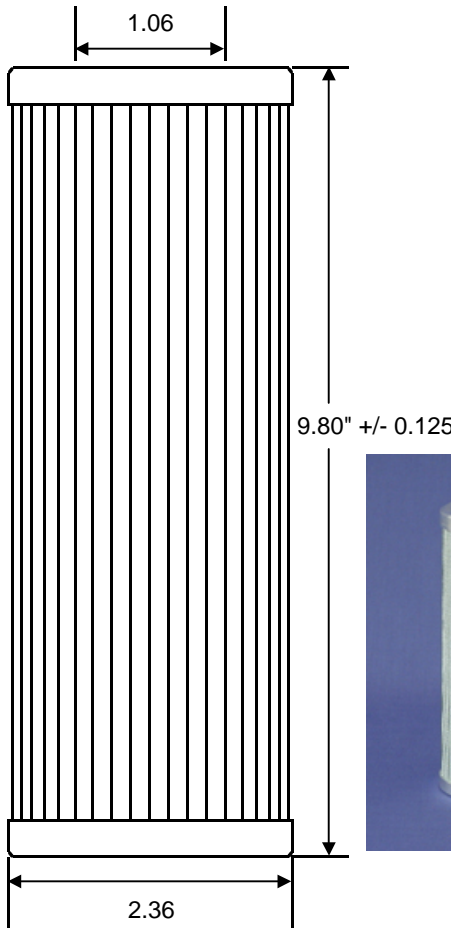

- Temperature Range: -4° to +212° with Nitrile Seals
- Hardware Material: Corrosion Protected metal endcaps and core
- Filter Medium: Inert Micro-Glass fibers impregnated with stable resin, supported by epoxy coated steel wire mesh
- Collapse Rating: 435 psid per ISO-2941
- Removal Rating: Beta 3 > 200 per ISO 4572

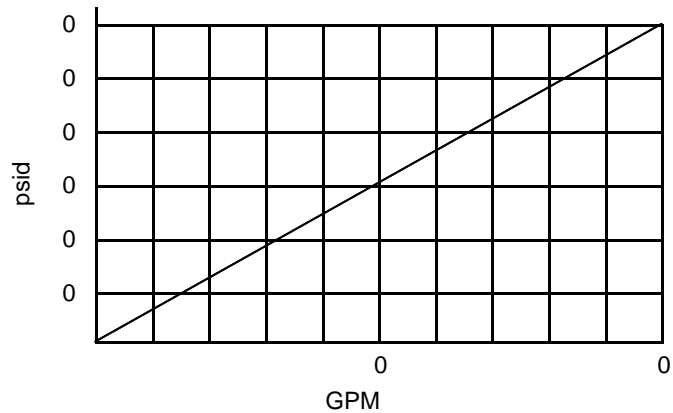

150 SUS, 0.9 SG Fluid  
Pressure drop varies linearly with viscosity.

Removal Rating ISO 4572	
Grade	Bx>200
3um	3

Removal Rating - ISO 16889						
Grade	um© Rating for Beta Value					
	2	10	75	100	200	1000
3um	<3	<3	3	3.2	3.8	5

All dimensions in inches, +/- 0.10 unless otherwise specified.

This confidential drawing and the information contained herein is the sole property of SophTech Worldwide and may not be used or reproduced in any manner without written consent.