


**SophTech**

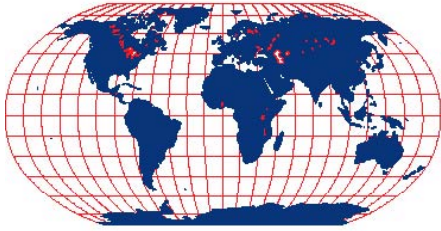

**Worldwide**

**SophTech Worldwide**

13131 Hamilton Commons Blvd

Fishers, Indiana 46037

Phone: 317-776-5680 Fax: 317-776-5687

[www.sophtech.net](http://www.sophtech.net)

[sales@sophtech.net](mailto:sales@sophtech.net)

**STF10-0283VYGE Series**

**Temperature Range:** -45° to +225° with Nitrile Seals

-20° to +250° with Viton Seals


**Hardware Material:** Corrosion Protected metal endcaps and core

**Filter Medium:** Inert Micro-Glass fibers impregnated with stable resin, supported by epoxy coated steel wire mesh

**Collapse Rating:** 3000 psid per ISO-2941


**Removal Rating:** Beta 2 > 200 per ISO 4572

**Seals Available:** "131" O'Ring, SOB

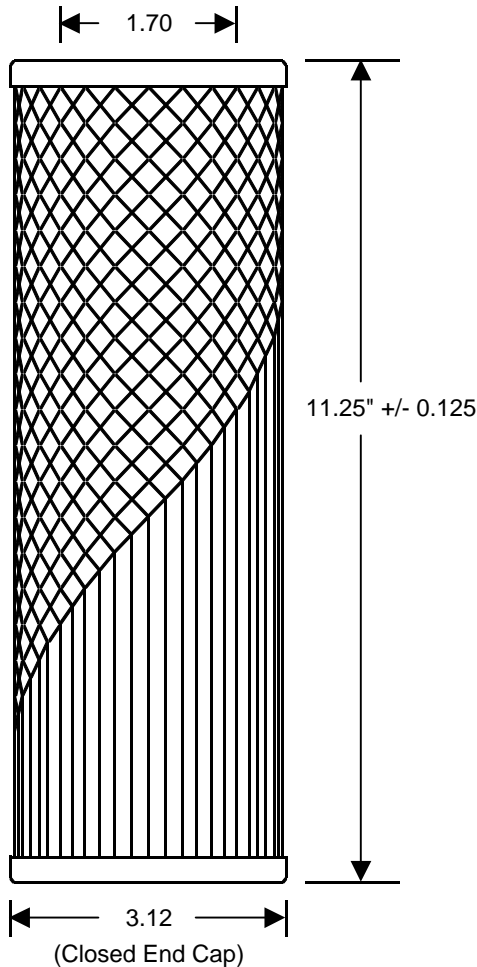

All dimensions in inches, +/- .010 unless otherwise specified.

This confidential drawing and the information contained herein is the sole property of SophTech Worldwide and may not be used or reproduced in any manner without written consent.

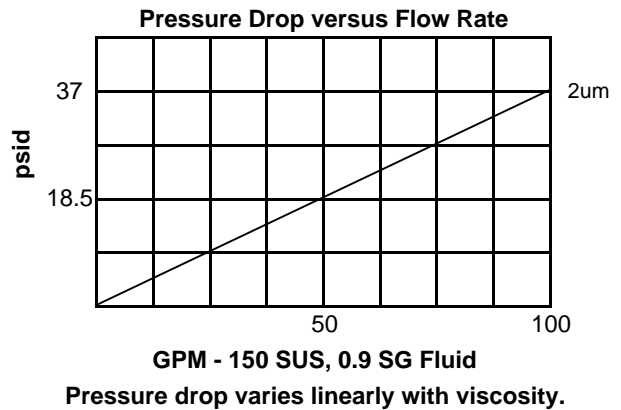

Removal Rating - ISO 16889						
Grade	um© for Beta Value					
	2	10	75	100	200	1000
2um	<2	<2	3	3.2	3.8	5



Filter Part Number Information	
STF10-0283VYGE	2um

Phone: 317-776-5680

Fax: 317-776-5687

Email: [sales@sophtech.net](mailto:sales@sophtech.net)