


SophTech

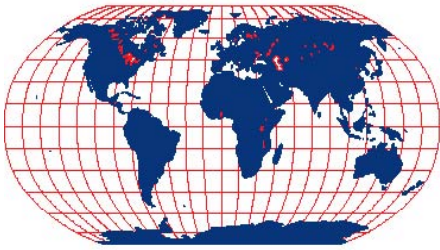

Worldwide

SophTech Worldwide

13131 Hamilton Commons Blvd

Fishers, Indiana 46037


Phone: 317-776-5680 Fax: 317-776-5687

www.sophtech.net


sales@sophtech.net

STF20-04258 Filter

- Temperature Range:** -20°C to +100°C (-4° to +212° F)
- By-Pass Setting:** 3 Bar. (43.5 Psi.)
- Filter Medium:** Inorganic Fiberglass
- Filter Efficiency:** 9.9um © at Beta 200 per ISO 16889
12.4um © at Beta 1000 per ISO 16889
- Collapse Rating:** 30 Bar. (435 psi.) per ISO-2941

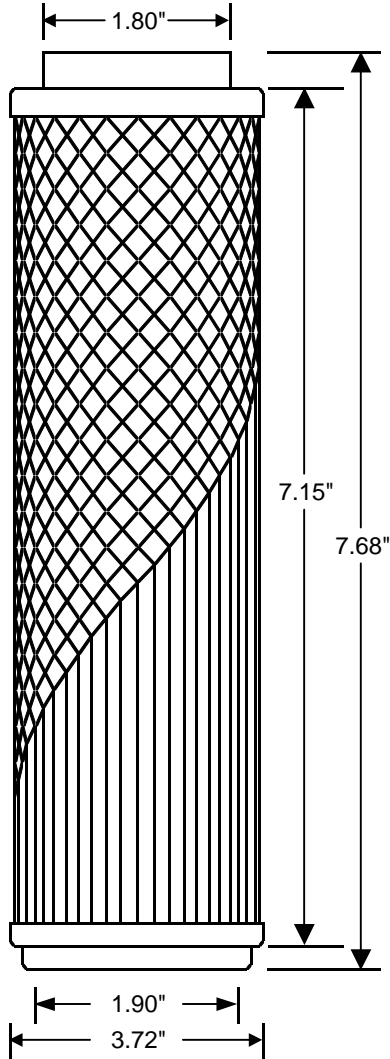


All dimensions in inches, +/- .010 unless otherwise specified.

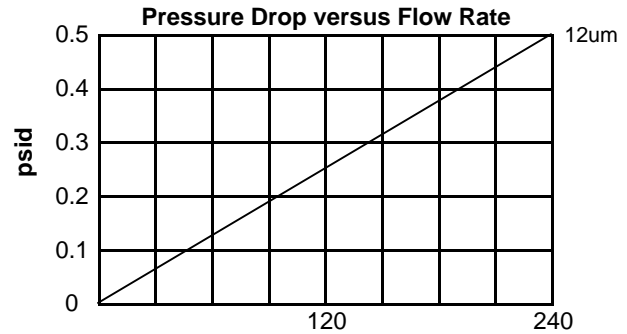

GPM - 150 SUS, 0.9 SG Fluid
Pressure drop varies linearly with viscosity.

Grade	Removal Rating - ISO 16889					
	um© for Beta Value					
	2	10	75	100	200	1000
10um	3.2	5.5	8.3	8.7	9.9	12.4

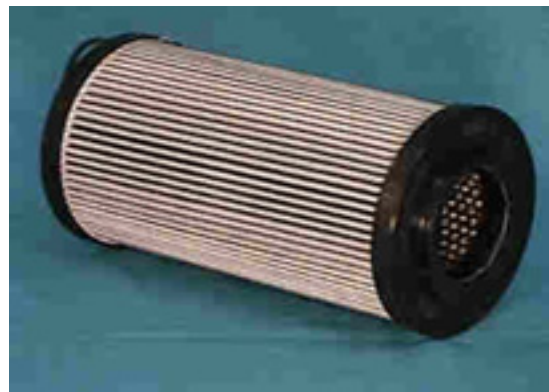

This confidential drawing and the information contained herein is the sole property of SophTech Worldwide and may not be used or reproduced in any manner without written consent.

Phone: 317-776-5680

Fax: 317-776-5687

Email: sales@sophtech.net